

ORWAK

FLEX 5030

FLEX

WE ARE PROUD TO PRESENT THE NEW CLASSIC ORWAK FLEX 5030!

The in-bag compactor was the very core of our business during the pioneering years of the 1970s. This versatile, sturdy and easy-to-use unit is still going strong. Now with a new fresh design! The compaction ratio of up to 10:1 is impressive!



Hygienic Compaction



Orwak benefits

MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimizes the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.



Why Orwak Flex?

- + Versatile compaction for many different application areas
- + Hygienic and safe compaction and disposal of mixed or hazardous waste
- + Special solutions for special needs

ORWAK FLEX 5030

A winning concept

ORWAK FLEX 5030 IS OPTIMIZED FOR:

PAPER
+ Paper sacks

PLASTIC FOIL
+ Shrink film
+ Plastic bags

METAL CANS
+ Food cans
+ Paint cans

SEMI-DRY WASTE
+ Bagged general
waste

THE NEW CLASSIC

In 1971 we invented the unique idea of constructing a compactor, where the bag is slipped over an open-ended steel drum for effective and hygienic compaction of mixed waste without risking damage to the bag in the process.

VERSATILE

The design means that the compactor is versatile, and the plastic bag can be used for most types of waste - despite the fact that the press force is three tons.

HIGH COMPACTION RATIO ON THE SPOT

The 5030 is a compact machine with a small footprint, but even though it requires little space, it still offers a high compaction ratio of up to 10:1!

Wheeled - for easy cleaning and relocation. Compact size and small footprint. The New Classic comes with a fresh design and a durable finish



Emptying height 2,660 mm is standard

USER FRIENDLY

It is easy to feed material into the the open top-loading unit. The compactor is safe and simple to maneuver and the built-in hoisting function makes the bag switch fast and convenient

HYGIENIC WASTE HANDLING

A compacted and well-sealed bag prevents leakage and odours. The machined is designed for easy daily cleaning and critical parts are made of stainless steel.

OPTIONAL ACCESSORIES FOR FLEXIBILITY



Optional steel container for safe handling of, for example, tins and glass after compaction.



A simple-to-use option - the Orwak bale/bag lifter. Eliminates manual heavy lifting.


DIMENSIONS & SPECIFICATIONS

DIMENSIONS ORWAK FLEX 5030 B+C

A	B	C	D	E
B 1940 mm C 1640 mm	B 760 mm C 760 mm	B 1045 mm C 1045 mm	B 2660 mm C 2360 mm	B 1100 mm C 1100 mm

ENERGY CONSUMPTION

STANDBY MODE	MAXIMUM OPERATION ONE HOUR
---	660 W/H

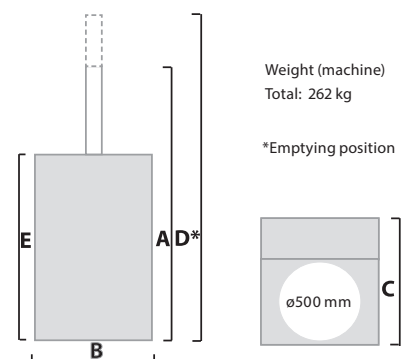

TECHNICAL SPECIFICATIONS

LOADING APERTURE	CYCLE TIME	PRESS FORCE	CHAMBER DIMENSIONS	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
ø 500 mm	36 secs	3 ton, 30 kN	(internal) Width: ø 500 mm Height: 800 mm	62 db (A)	IP 55	Single phase 230 V, 50 Hz, 10 A



GS PACKAGING

مؤسسة فصول الخليج لمعدات وأدوات التغليف
GULF SEASON STRAPPING & PACKAGING SYSTEMS

Dammam Head Office: Tel: +966 (13) 847 3734 / 847 3735, Fax: +966 (13) 847 3740
Riyadh Branch: Tel: +966 (11) 438 9060, Fax: +966 (11) 438 9061
Jeddah Branch: Tel: +966 (12) 608 4832, Fax: +966 (12) 608 4835
Website: www.gspackaging.net
E-mail: sales@gspackaging.net, info@gspackaging.net

