


Pneumatic pusher type combination steel strapping tool

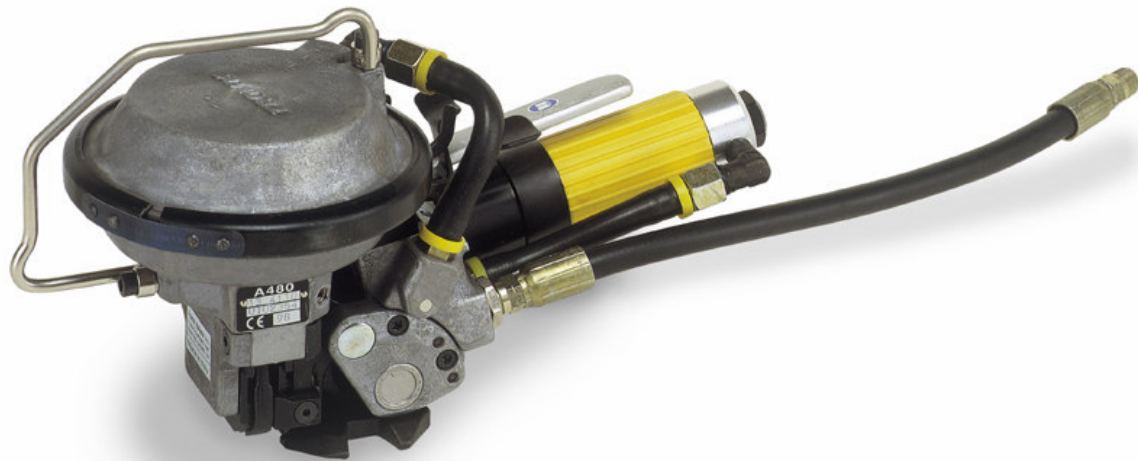

Characteristics

Strapping qualities:	Uniflex and Ultraflex max. 1100 N/mm ² / 160'000 psi
Strapping dimensions:	widths 10.0 - 19.0 mm / ³ / ₈ - ³ / ₄ "
thicknesses	0.38 - 0.63 mm / .015 - .025"
Weights:	4.5 kg / 9.9 lbs without suspension 4.6 kg / 10.1 lbs with suspension
Average seal strength:	approx. 75 %
Seals:	Overlap seals, see chart
Type of joint:	Single notch joint
Strap tension:	The tool is available for two different stages of strap tension, see chart
Suspensions (Optional):	Suspension bracket for standard and vertical applications is supplied with the tool suspension bracket for horizontal and vertical applications; have to be ordered separately, see accessories

Advantages

- Very suitable for strapping of bars, bundles, pipes, coils and packages having a small surface
- If used for stationary operation the tool may be suspended on a spring loaded balancer using a suspension bracket (see suspensions)

Chart of types model A480

Item No.	Model	Uniflex and Ultraflex max. 1100 N/mm ² / 160'000 psi				Max. Tension		Tension speed	
		Width		Thickness es		N	lbs	mm/sec.	inch/sec.
		mm	inch	mm	inch				
13.4050	A480/10/0.38-0.63/4.5	10.0	3/8"	0.38-0.63	.015-.025	4500	1000	100	4.0
13.4052	A480/10/0.38-0.63/2.5	10.0	3/8"	0.38-0.63	.015-.025	2500	560	180	7.1
13.4070	A480/13/0.38-0.63/4.5	13.0	1/2"	0.38-0.63	.015-.025	4500	1000	100	4.0
13.4072	A480/13/0.38-0.63/2.5	13.0	1/2"	0.38-0.63	.015-.025	2500	560	180	7.1
13.4090	A480/16/0.38-0.63/4.5	16.0	5/8"	0.38-0.63	.015-.025	4500	1000	100	4.0
13.4092	A480/16/0.38-0.63/2.5	16.0	5/8"	0.38-0.63	.015-.025	2500	560	180	7.1
13.4110	A480/19/0.38-0.63/4.5	19.0	3/4"	0.38-0.63	.015-.025	4500	1000	100	4.0
13.4112	A480/19/0.38-0.63/2.5	19.0	3/4"	0.38-0.63	.015-.025	2500	560	180	7.1

 Uniflex = Regular duty strapping max. 850 N/mm² / 1000'23 psi

 Ultraflex = High tensile strapping max. 1100 N/mm² / 0'160 00 psi

Accessories

 A48.1304 Suspension bracket for
 horizontal and vertical applications

Recommended seals

Width mm	Inch	Dimensions (W, L, T)	
		mm	inch
10	3/8"	10 x 22 x 0.6	³ / ₈ x ⁷ / ₈ x .024
13	1/2"	13 x 22 x 0.6	¹ / ₂ x ⁷ / ₈ x .024
16	5/8"	16 x 22 x 0.6	⁵ / ₈ x ⁷ / ₈ x .024
19	3/4"	19 x 22 x 0.6	³ / ₄ x ⁷ / ₈ x .024

 Tensile strength of the seal material: 600 N/mm² / 87'000 psi

 مؤسسة فصول الخليج لمعدات وأدوات التغليف
 GULF SEASON STRAPPING & PACKAGING SYSTEMS

 Dammam Head Office: Tel: +966 (13) 847 3734 / 847 3735, Fax: +966 (13) 847 3740
 Riyadh Branch: Tel: +966 (11) 438 9060, Fax: +966 (11) 438 9061
 Jeddah Branch: Tel: +966 (12) 602 0241, Fax: +966 (12) 602 0167
 Website: www.gspackaging.net
 E-mail: sales@gspackaging.net, info@gspackaging.net