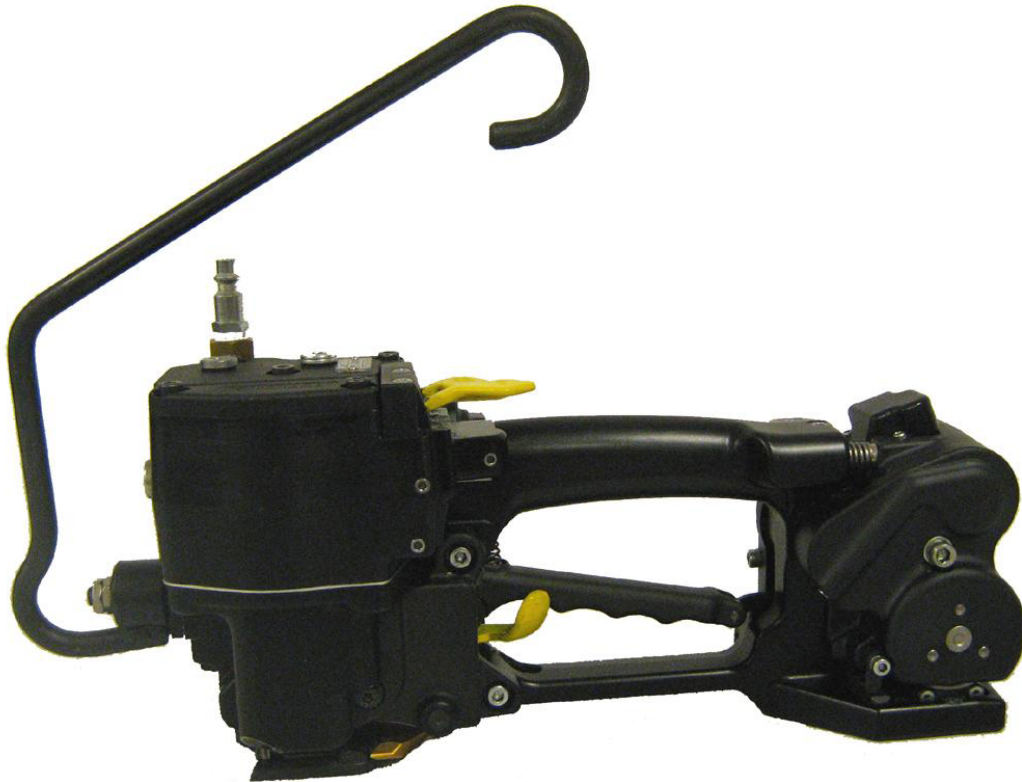


Pneumatic sealless plastic strapping tool for round or small surface applications

**Characteristics**

Strapping qualities:	Polypropylene (PP) and Polyester (PET)	
Strapping dimensions:	widths	13.0 – 19.0 mm / 1/2 – 3/4"
	thicknesses	0.40 – 1.35 mm / .016 – .053"
Weight incl. suspension bracket:	6.8 kg / 15 lbs	
Tool sizes with suspension bracket:	L390 x W135 x H305 mm / 15.4" x 5.3" x 12.0"	
Average seal strength:	up to 75% (dependent on strap quality)	
Type of seal:	Friction weld sealing	
Strap tension:	600 – 2000 N / 135 – 450 lbs (adjustable)	
Tensioning speed:	120 – 260 mm/s / 4.7 – 10.2 inch/s	
Max. air pressure:	6.0 bar / 87 psi	
Min. package size:	Flat packages: 80 mm / 3.1" Round packages: 2 x \varnothing 70 mm / 2.7" or 1 x \varnothing 240 mm / 9.4"	

Advantages

- Unique high tension friction weld plastic strapping tool for round and small surface applications – first tool in its class
- Robust design guarantees high reliability
- Applicable for surfaces of min. 80 mm (3.1") and small diameters of min. 240 mm (9.4")
- Combination tool outperforms separate tensioner and sealer operation
- Higher work efficiency and performance
- Friction weld seal is superior to seal joints with a seal
- Opportunity to convert steel strapping to PET strapping for round applications - no seals and the advantages of PET strapping generate important savings

Chart of types model P 380

Item No.	Model	Strap widths		Strap thicknesses		Max. Tension		Tension speed	
		mm	inch	Mm	inch	N	lbs	mm/sec.	inch/sec.
49.3801	P 380/13/0.4-0.64	13	½"	0.40-0.64	.016-.025	2000	450	120-260	4.7-10.2
49.3802	P 380/13/0.65-1.05	13	½"	0.65-1.05	.026-.041	2000	450	120-260	4.7-10.2
49.3811	P 380/15/0.4-0.64	15		0.40-0.64	.016-.025	2000	450	120-260	4.7-10.2
49.3812	P 380/15/0.65-1.05	15		0.65-1.05	.026-.041	2000	450	120-260	4.7-10.2
49.3821	P 380/16/0.4-0.64	16	5/8"	0.40-0.64	.016-.025	2000	450	120-260	4.7-10.2
49.3822	P 380/16/0.65-1.05	16	5/8"	0.65-1.05	.026-.041	2000	450	120-260	4.7-10.2
49.3831	P 380/19/0.4-0.64	19	¾"	0.40-0.64	.016-.025	2000	450	120-260	4.7-10.2
49.3832	P 380/19/0.65-1.05	19	¾"	0.65-1.05	.026-.041	2000	450	120-260	4.7-10.2
49.3833	P 380/19/1.06-1.35	19	¾"	1.06-1.35	.042-.053	2000	450	120-260	4.7-10.2



مؤسسة فصول الخليج لمعدات وأدوات التغليف
GULF SEASON STRAPPING & PACKAGING SYSTEMS

Dammam Head Office: Tel: +966 (13) 847 3734 / 847 3735, Fax: +966 (13) 847 3740
Riyadh Branch: Tel: +966 (11) 438 9060, Fax: +966 (11) 438 9061
Jeddah Branch: Tel: +966 (12) 602 0241, Fax: +966 (12) 602 0167
Website: www.gspackaging.net
E-mail: sales@gspackaging.net, info@gspackaging.net